

Mixed Flow Duct Fan 斜流管道风机



CE RoHS

Specification: 97mm, 123mm, 147mm, 196mm, 245mm, 310mm.

Ambient temperature: between -10 Celsius degree (14 Fahrenheit degree) and 60 Celsius degree (140 Fahrenheit degree).

The unique design of the support bracket allows the motor and blade assembly to be fitted or removed without dismantling the adjacent ducting.

管口直径: 97mm, 123mm, 147mm, 196mm, 245mm, 310mm.

环境温度介于 -10摄氏度(14华氏度)至 60摄氏度(140华氏度)之间使用。



支架采用独特的设计, 拆除电机和风扇组件时, 无需拆除相邻的管道。



IPx2

External Rotor Motor
采用外转子电机

External Dimensions 外形尺寸图



Dimension Table 尺寸表

Units 单位:mm

型号 Model No.	A	B	C	D	E
DJT10-23S	81	60	281	220	97
DJT12-33S	81	60	281	220	123
DJT15-45S	90	74	305	245	147
DJT20-55S	91	101	310	268	196
DJT25-66S	152	110	387	340	245
DJT30-67S	182	140	450	405	310



Mixed Flow Duct Fan 斜流管道风机

Electrical Ratings 技术参数

型号 Model No.	额定电压/频率/相数 Rated Voltage/ Frequency/ Phase	风叶直径 Blade Diameter (mm)	档位 Setting	功率 Power (W)	转速 Rotating Speed (R.P.M.)	风量 Air Volume (m ³ /h)	静压 Static Pressure (Pa)	噪音 Noise (dB)	电机绝缘等级 Insulation Class	净重 Net Weight (kg)	
DJT10-23S	220V~/50Hz/1Ph	154	高档 High	30	2250	205	158	30	E	1.7	
			低档 Low	25	1800	170	125	25			
DJT12-33S		154	高档 High	38	2200	350	160	31		1.7	
			低档 Low	28	1700	265	125	25			
DJT15-45S		172	高档 High	57	2500	570	280	34		2.4	
			低档 Low	49	1900	450	240	30			
DJT20-55S		193	193	高档 High	133	2450	970	345		61	3.0
				低档 Low	98	1900	760	260		52	
DJT25-66S		250	250	高档 High	230	2450	1410	500		65	7.6
				低档 Low	163	1950	1080	380		59	
DJT30-67S	308	308	高档 High	295	2350	2180	645	68	10.3		
			低档 Low	205	1750	1730	430	62			

Performance Curve 性能曲线图

- A: DJT10-23S(低档 Low) B: DJT10-23S(高档 High) E: DJT15-45S(低档 Low) F: DJT15-45S(高档 High)
C: DJT12-33S(低档 Low) D: DJT12-33S(高档 High) G: DJT20-55S(低档 Low) H: DJT20-55S(高档 High)

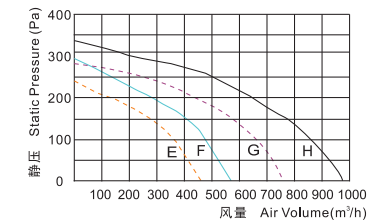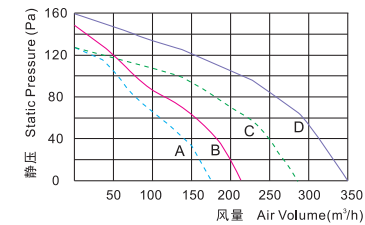

- I: DJT25-66S(低档 Low) J: DJT25-66S(高档 High)
K: DJT30-67S(低档 Low) L: DJT30-67S(高档 High)

