

Commercial Energy Recovery Ventilation
商用型全热新风交换机


Electrical Ratings 技术参数

产品型号 Model No.	额定电压/ 频率/ 相数 Rated Voltage/ Frequency/ Phase	档位 Setting	功率 Power (W)	风量 Air Volume (m³/h)	静压 Static Pressure (Pa)	温度交换效率 Sensible Heat Efficiency (%)		焓交换效率 Enthalpy Efficiency (%)		噪音 Noise (dB)	管口尺寸 Duct Size (mm)	外形尺寸 Unit Size L x W x H (mm)	净重 Net Weight (kg)
						制冷 Cooling	制热 Heating	制冷 Cooling	制热 Heating				
QFA-D150R-S	220V~ / 50Hz/ 1Ph	高档 High	87	150	195	64	78	65	69	38	125	800x657x200	20.0
		低档 Low	64	113	155	65	79	64	73	36			
QFA-D250R-S		高档 High	145	250	220	65	77	64	68	40	148	800x657x200	20.0
		低档 Low	128	195	200	66	80	66	72	38			
QFA-D350R-S		高档 High	255	350	285	50	77	59	68	42	148	885x737x250	27.3
		低档 Low	215	305	270	55	81	63	71	40			
QFA-D500R-S		高档 High	265	500	295	56	70	56	66	43	198	885x737x250	27.3
		低档 Low	215	365	285	60	71	58	67	40			
QFA-D800R-S		高档 High	446	800	380	56	69	55	65	45	250	1150x977x355	56.0
QFA-D800R-S-Y		低档 Low	382	660	345	60	71	58	67	43			
QFA-D1000R-S		高档 High	530	1000	395	59	71	58	66	48	250	1250x977x355	58.0
QFA-D1000R-S-Y		低档 Low	425	805	365	62	74	60	70	46			
QFA-D1500R-S		高档 High	1165	1500	485	55	68	54	64	50	310 x 260	1200x1077x420	76.0
QFA-D1500R-S-Y		低档 Low	945	1240	470	58	70	57	66	48			
QFA-D2000R-S		高档 High	1420	2000	510	58	69	54	64	52	360 x 280	1400x1227x420	88.0
QFA-D2000R-S-Y		低档 Low	1195	1490	490	63	71	58	66	50			

产品型号 Model No.	额定电压/ 频率/ 相数 Rated Voltage/ Frequency/ Phase	功率 Power (W)	风量 Air Volume (m³/h)	静压 Static Pressure (Pa)	温度交换效率 Sensible Heat Efficiency (%)		焓交换效率 Enthalpy Efficiency (%)		噪音 Noise (dB)	管口尺寸 Duct Size (mm)	外形尺寸 Unit Size L x W x H (mm)	净重 Net Weight (kg)
					制冷 Cooling	制热 Heating	制冷 Cooling	制热 Heating				
QFA-D2500R-S	380V~ / 50Hz/ 3Ph	900	2500	220	70	75	66	69	59	350 x 220	1420x1295x480	145
QFA-D3000R-S		1100	3000	230	69	75	65	68	60			
QFA-D4000R		1300	4000	260	69	75	65	68	63	475 x 400	1710x1305x680	205
QFA-D4000R-Y										345 x 230		
QFA-D5000R		2000	5000	280	69	75	65	68	65	550 x 400	1830x1455x680	230
QFA-D5000R-Y										345 x 230		
QFA-D6000R		3200	6000	300	71	76	66	69	66	650 x 470	1960x1655x750	290
QFA-D6000R-Y										360 x 265		
QFA-D8000R		6000	8000	300	71	76	65	69	68	578 x 478	2230x1725x890	360
QFA-D8000R-Y										420 x 320		
QFA-L2000R		1100	2000	200	76	66	70	60	60	345 x 213	1285x1050x1250	212
QFA-L2500R		1600	2500	200	76	66	70	61	61	345 x 230	1285x1050x1550	255
QFA-L3000R		1600	3000	210	76	66	70	61	61	345 x 230	1285x1050x1550	280
QFA-L4000R		2200	4000	220	75	65	69	63	60	360 x 265	1435x1100x1650	318
QFA-L5000R		3000	5000	260	75	65	69	65	60	360 x 285	1435x1100x1650	385
QFA-L6000R		3000	6000	300	76	65	70	64	64	385 x 287	1585x1100x1650	530
QFA-L8000R		4400	8000	300	76	66	70	68	68	385 x 296	1885x1200x2150	660
QFA-L10000R		6000	10000	300	76	66	70	69	69	430 x 335	1885x1200x2150	720
QFA-L15000R		11000	15000	450	76	66	70	72	72	585 x 470	2435x1200x2450	980
QFA-L20000R		15000	20000	400	75	65	69	74	74	640 x 520	2435x1200x2600	1150

Commercial Energy Recovery Ventilation
商用型全热新风交换机

External Dimensions 外形尺寸图

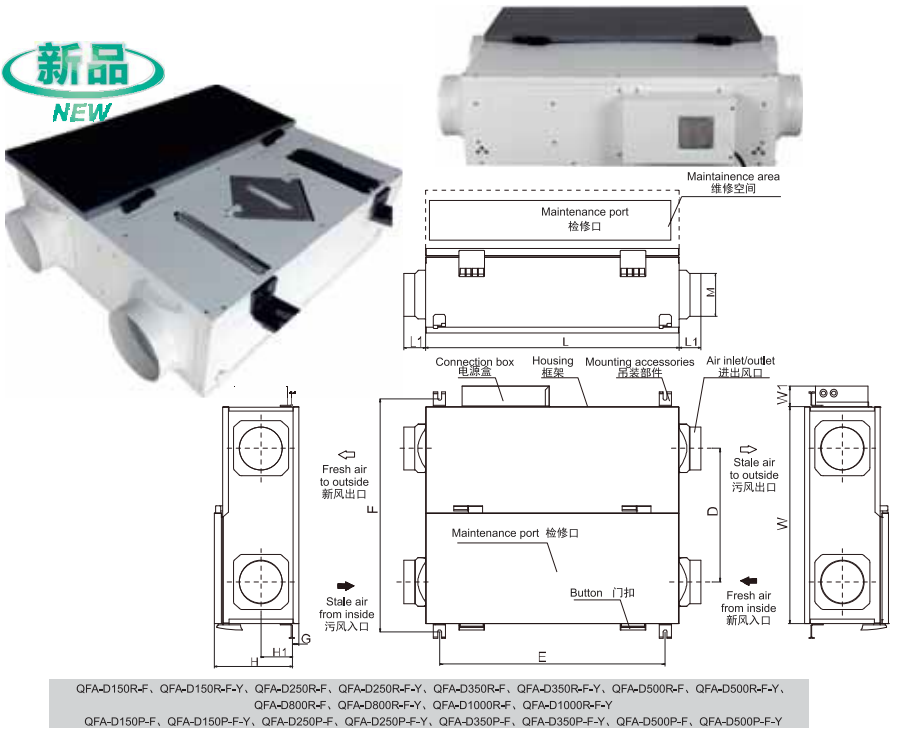

Dimension Table 尺寸表

型号 Model No.	Unit 单位: mm										
	L	L1	W	W1	H	H1	D	E	F	G	M
QFA-D150R-F, QFA-D150R-F-Y	670	65	550	60	225	100	308	590	597	19	Φ125
QFA-D250R-F, QFA-D250R-F-Y	670	65	550	60	225	100	291	590	597	19	Φ150
QFA-D350R-F, QFA-D350R-F-Y	735	75	630	60	275	125	392	655	677	19	Φ150
QFA-D500R-F, QFA-D500R-F-Y	735	75	630	60	275	125	340	655	677	19	Φ200
QFA-D800R-F, QFA-D800R-F-Y	1000	75	850	80	380	178	483	860	860	145	Φ250
QFA-D1000R-F, QFA-D1000R-F-Y	1100	75	850	80	380	178	483	960	960	145	Φ250
QFA-D150P-F, QFA-D150P-F-Y	735	65	630	60	245	110	388	655	676	18	Φ125
QFA-D250P-F, QFA-D250P-F-Y	735	65	630	60	245	110	388	655	676	18	Φ150
QFA-D350P-F, QFA-D350P-F-Y	935	75	760	60	275	125	469	855	806	18	Φ150
QFA-D500P-F, QFA-D500P-F-Y	935	75	760	60	275	125	469	855	806	18	Φ200